

# SightSensor GT (International)

Smart Thermal Detection Camera

**sightlogix**  
making outdoor video... *smarter*

## Outstanding Thermal Intruder Detection

The SightSensor GT is a smart thermal camera that detects, analyzes and communicates real-time intruder activity over site perimeters and buffer zones. The GT works at the edge and includes powerful video processing, geo-aware video analytics, automatic stabilization, exceptional thermal clarity, and a toolbox of filters to optimize outdoor intruder detection performance.



### FEATURES

- ✓ Powerful image processing
- ✓ Geospatial video analytics
- ✓ Outstanding thermal image clarity

### BENEFITS

- ✓ Accurate detection, extended range, low false alarms
- ✓ Higher detection accuracy, lower false alarms
- ✓ Nighttime surveillance without lighting

### PROCESSING YIELDS OUTSTANDING THERMAL DETECTION AND CLARITY



### AVAILABLE ACCESSORIES

#### Mounts

Wall and pole mounts available. Refer to the *SightLogix Accessories* datasheet.

#### SightMonitor II

Site management and GPS target display software. Refer to the *SightLogix SightMonitor II* datasheet.

#### SightTracker

Automatic PTZ controller. Refer to the *SightLogix SightTracker* datasheet.

### ORDERING INFORMATION

Part Number	Inbound Detection	FOV	Focal Length
GT690-020	75m / 246 ft	90°	7.5 mm
GT670-020	100m / 328 ft	70°	9 mm
GT650-020	145m / 475 ft	50°	13 mm
GT632-020	220m / 722 ft	32°	19 mm
GT624-020	300m / 984 ft	24°	25 mm
GT617-020	410m / 1345 ft	17°	35 mm
GT612-020	595M / 1952 ft	12°	50 mm

Crossfield detection may be up to 50% further, depending on application conditions.

PN 6-200022-003 May 2022

# Specifications

## Imager and Video Output

**Detector:** Un-cooled VOx Microbolometer, 17 micron

**Resolution:** 640x480 (fixed lens)

**Dynamic Range:** 14 bit digital sensor interface

**Sensitivity (NETD):** 40mk/f1.0/25°C

**Frame Rate:** Up to 25 FPS; user configurable

**Video Output:** H.264, MPEG-4 (Simple Protocol), MJPEG

## Video Analytics

**Video Analytic Rules**  
(Up to 64 individual Alarm Zones)

Motion Tracking, From/To Zones, Target Size Filtering, Wrong-Way Direction, Loitering, Object Left Behind, Speed, Time of Day, Mask Zones

**Onboard Storage** - Built-in microSD slot (card not supplied; high-endurance cards strongly recommended). Stored clips accessed via WebConfig.

### Target Object Parameters

Time, alarm state, creation time, GPS position, size, heading, speed, aspect ratio, and alarm zone

## Electrical

### Power Requirements:

Without Window Heater:

-12W, 24VAC +/- 10% or PoE IEEE 802.3af

With Window Heater (24VAC only):

-32W 24VAC (1.5 amps)

**I/O Connectors:** RJ45 (Ethernet), SMB (video in & out), terminal blocks for RS422/RS232, power, relay out

**Relay Out:** Max current: 0.3A, Max voltage 24VDC

## Target Tracking Output

### Communications

Metadata via industry standard XML over a HTTP/HTTPS interface for 3rd-party integration

### SightTracker (optional)

Provides detected targets' GPS coordinates to automatically position supported PTZ cameras for continual tracking

## Network

### Ethernet Wired

100 RJ45, IEEE 802.3, 802.3i, 802.3u

**Data Rate:** 64 kbps to 8 Mbps

**Operating Mode:** 100 Mbps - Full-duplex, Half-duplex

**Protocols:** DHCP, IPv4, HTTP, HTTPS, SSL, SLP, DNS, NTP, RTSP, RTP, TCP, UDP, IGMP, RTCP, ICMP, ARP

**Configuration:** Browser-based WebConfig (SightMonitor II for site-wide management)

## Camera Enclosure

**Weight:** 2.1 kg (4.6 lbs.)

### Mounting

3 x 1/4-20 UNC bolts

### Dimensions

30.7 cm L x 14.7 cm W x 14.0 cm H

### Powder Coat Rating

1000 sea-spray hours

**Enclosure:** IP66

## Environmental

### Operating Temperature

-40° to +60°C (-40° to +140°F)

### Relative Humidity


0 to 100%

### Storage Temperature

-40° to +80°C (-40° to 176°F)

### Safety Compliance

FCC Part 15, Class A, CE

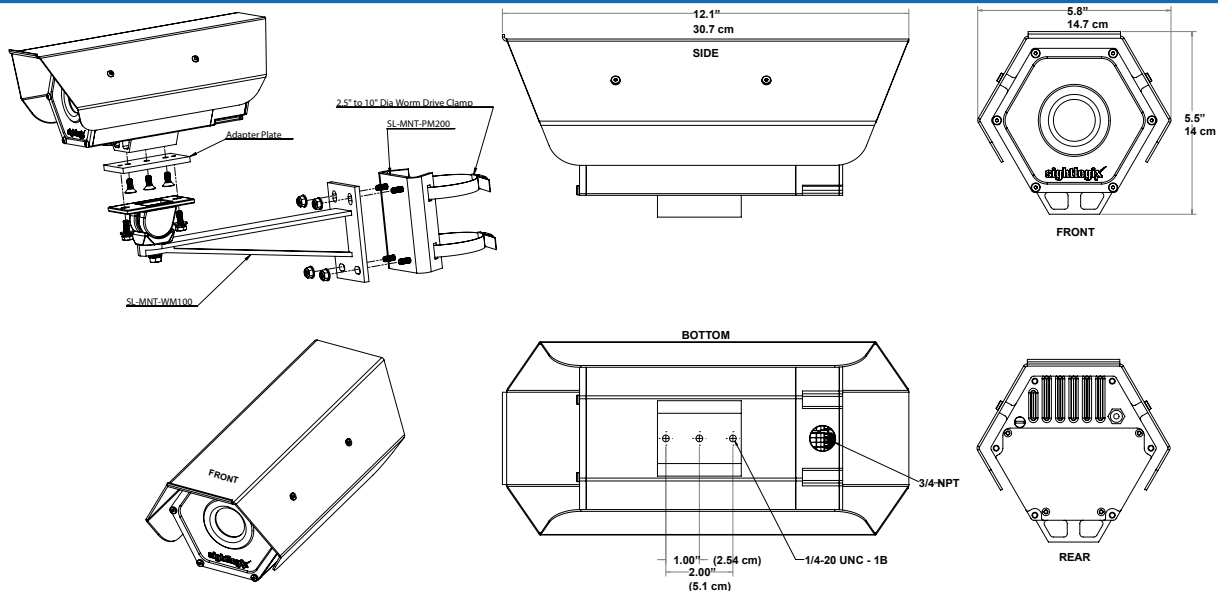

Specifications are subject to change without notice. © SightLogix, Inc. SightLogix, SightSensor and SightMonitor are registered trademarks of SightLogix, Inc. Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited.

745 Alexander Road | Princeton, NJ 08540 | p +1 609.951.0008 | f 609.951.0024 | [www.sightlogix.com](http://www.sightlogix.com)